





An inspection certificate is supplied as standard. Refer to page U-9 for details.

Dial Test Indicator SERIES 513 — Horizontal (20° Tilted Face), Vertical, and Parallel Types


- Specially designed for easy viewing of dial.

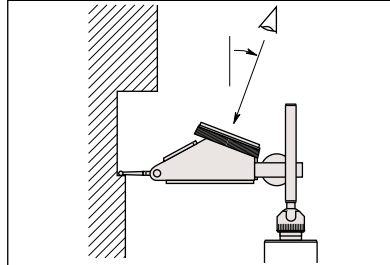

- The dial face obliquely faces upward, allowing users to read the graduations from the user's side. It is convenient when probing on the side of a large workpiece and the workbench is high.

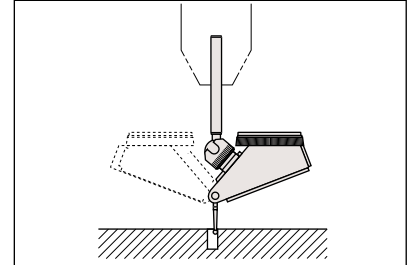


- Using the universal holder allows easy hole centering. The dial face always faces upward when the indicator is rotated, which makes reading easy.




Graduation: 0.01 mm
Range: 0.8 mm

Carbide contact point




Graduation: 0.0005 in
Range: 0.03 in

Carbide contact point




Graduation: 0.01 mm
Range: 1.6 mm

With revolution counter
 Carbide contact point




Graduation: 0.002 mm
Range: 0.4 mm

With revolution counter
 Carbide contact point



Graduation: 0.01 mm
Range: 0.8 mm

Carbide contact point



Graduation: 0.002 mm
Range: 0.2 mm

Carbide contact point

Note: 513-4XX-10 is indicated on the dial face. But the Order No. for the set provided with the stem etc. has a suffix (E or A or T) at the end.